



# Holmes HEH8031 Housing Replacement

Holmes HEH8031 Housing Replacement Prerequisite Only

Written By: Deanna Jack



## INTRODUCTION

Holmes HEH8031 Housing Replacement

Prerequisite Only

---



### TOOLS:


- [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Housing



- Ensure the device is unplugged from the wall outlet.



## Step 2

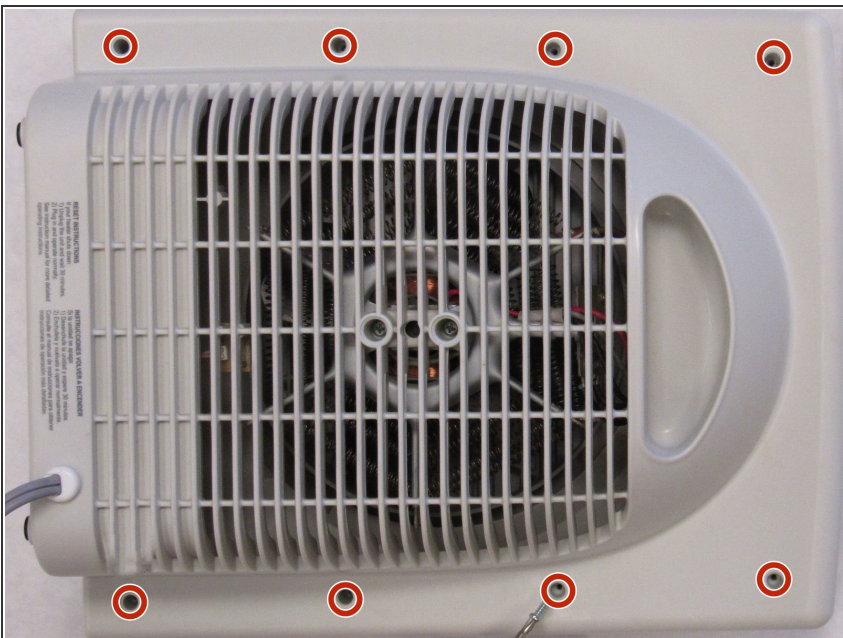

- Remove eight 12-mm Phillips #2 screws from the back cover.



## Step 3

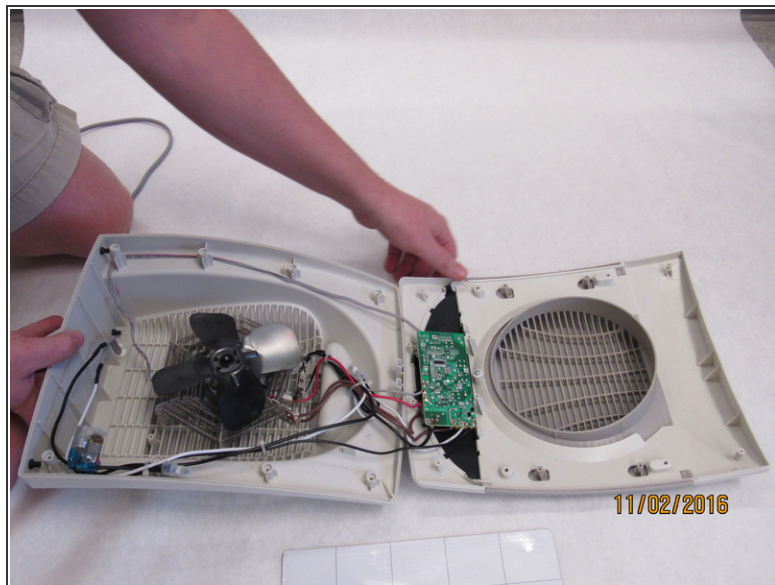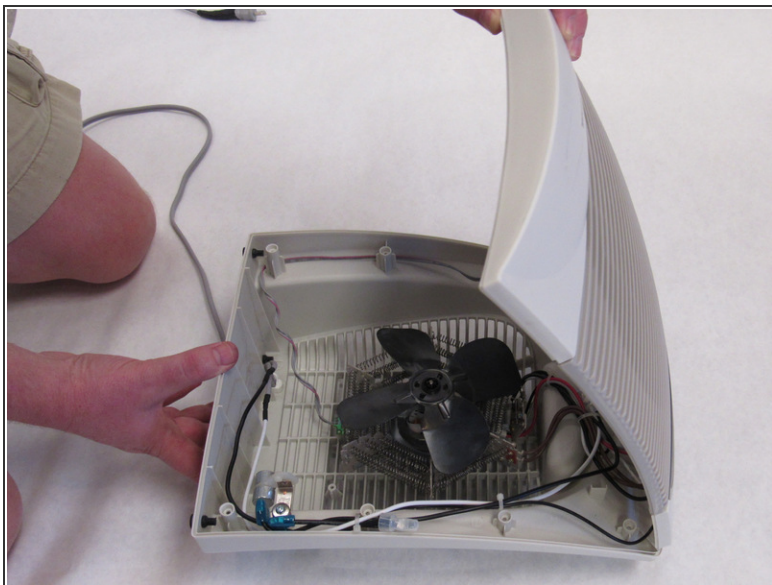

- Turn heater over so the controls are facing up.
  - Lift the front housing away from the back of the fan and slowly fold the front housing back down to the floor.
- i** Internal wires are connected to both halves of the housing. Be careful when separating the housing.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-12 03:07:40 AM.